

**Harvey  
Roofing Products**  
A DIVISION OF MACSTEEL

**YOUR QUALITY  
ROOFING INNOVATORS**

# HARVEYTILE Product Range

June 2023



**Beware of Imitations. Look for  
the Harveytile Quality Stamp.**


[www.harveyroofingproducts.co.za](http://www.harveyroofingproducts.co.za)  
Tel: +27 11 741 5600  
[info@harveyroofingproducts.co.za](mailto:info@harveyroofingproducts.co.za)



**If it doesn't say Harveytile, it's not a Harveytile**

Please note: Colours on screen and print may differ from the actual roof tile colour.

**A DIVISION OF MACSTEEL**

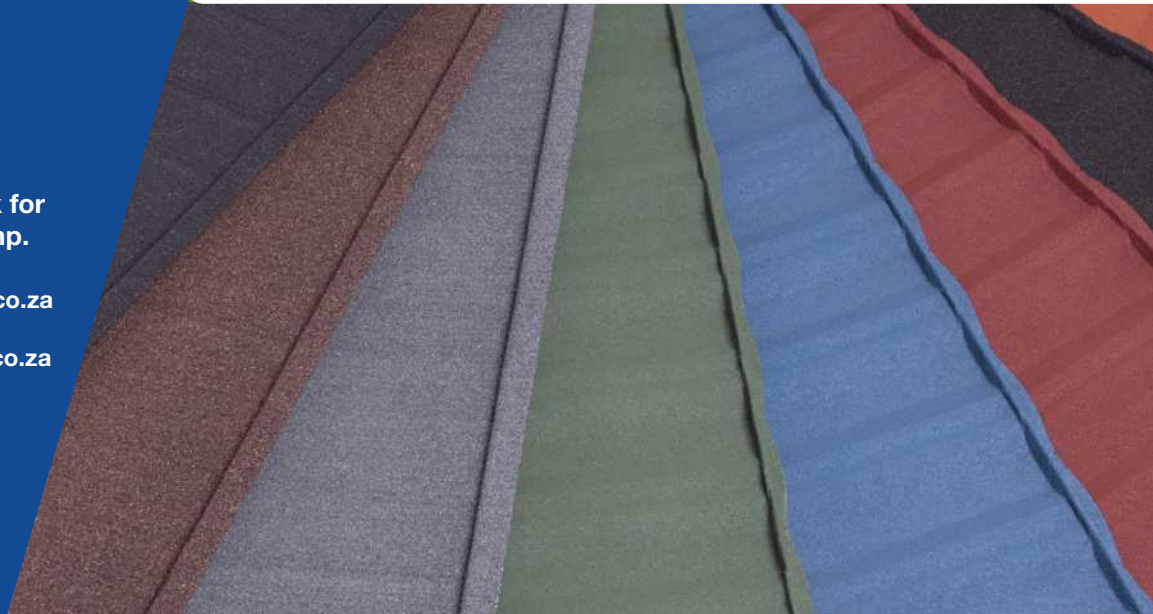

# Harvey Roofing Products

Selecting any building product is a process fraught with potential problems.

Not only does one need to satisfy oneself that the product is valid for the application, one must also be totally confident that the product is reputable, reliable and well established.

Since 1967 Harvey Roofing Products have been manufacturing steel roofing tiles and accessories, and from modest beginnings our products, through high quality and service, have evolved into one of the sturdiest and most attractive roofing systems available on the market.



**Strong Foundations**  
The same strict code of professionalism, quality and service has placed Harvey Roofing Products at the top of the steel roofing business, and our reputation has been steadily extended through the obvious satisfaction of Specifiers, Builders and Homeowners alike.

**Strong On Looks**  
Harvey Roofing Products manufactures several roofing systems. Our range of roof tiles offer superb structural integrity and immaculate appearance. Our world-class factory based in Brakpan, South Africa, is one of the largest of its kind in the world and maintains high quality standards.

**Strong In Design**  
Each steel based tile is designed and manufactured for strength. The unique overlapping system and fixing technique provide not only a leakproof roof but also burglar resistant. All tiles are available in galvanised mild steel substrate or alternatively in Alu-Zinc coated mild steel for added long term corrosion resistance.



**Durable**  
Through decades of on-going research and development, the acrylic coating (which was initially developed in 1970) can now withstand high ultra-violet levels and the most adverse weather conditions. The small stone granules bonded to the tile surface result in a durable finish which protects against extensive weathering such as gale force winds, pelting rain and hailstorms. Our MidnightBlack and Greystone ranges are covered with natural stone.

**Low on Maintenance**  
A Harveytile roof is low on maintenance, which means you don't have the inconvenience of fixing leaks or replacing broken tiles. Painting frequency is reduced due to the high quality acrylic coating. Stone coated tiles do not require any overpainting.

**Versatile**  
Harveytiles are also superb for re-roofing, easily turning your house into a prize home in just two to three days.

**Strong On Savings**  
The excellent weight-to-strength ratio means that, with our tiles, you invest your money in the tiles and not in costly roof structures.


**Weatherproof**  
The durable, steel-based tile can withstand the impact of the elements.

**20 Year Warranty**  
Harvey Thatch is low on maintenance and has excellent functional benefits, offering a 20 year Product Warranty.



# Product Range


## Harvey Elite Tile

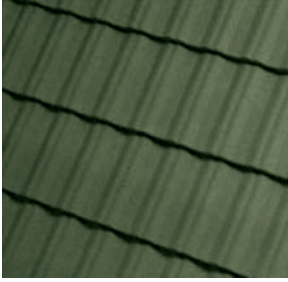

### Tile Specification (Approx.)

Overall Length:	1675 mm
Cover:	1600 mm
Overall Width:	397 mm
Cover:	369 mm
Mass per tile:	3,9 kg
Mass per sq. metre:	6,6 kg
No. of tiles per sq. metre:	1,69

## Harvey Shake Tile

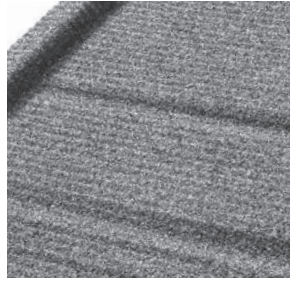

### Tile Specification

Overall Length:	1675 mm
Cover:	1 625 mm
Overall Width:	395 mm
Cover:	350 mm
Mass per tile:	4,2 kg
Mass per sq. metre:	6,9 kg
No. of tiles per sq. metre:	1,76

## Harvey Thatch Tile



### Tile Specification

Overall Length:	1675 mm
Cover:	1 625 mm
Overall Width:	395 mm
Cover:	350 mm
Mass per tile:	4,2 kg
Mass per sq. metre:	6,9 kg
No. of tiles per sq. metre:	1,76

## Harvey Solar Bracket



### Bracket Specification


The Harvey Solar bracket is suitable for the application of solar panels and geysers. Manufactured from high tensile steel, there is no need to pierce the Harvey Roof Tile and risk a leaking roof. The Harvey Solar Bracket is easily fitted onto the timber or steel batten.

Uniform Wind Uplift: 2Kn/m<sup>2</sup>

Colours on screen and print may differ from the actual roof tile colour. Information may change without prior notice. Please confirm current specification for the latest information.

# Colour Range


## STANDARD ACRYLIC COLOUR RANGE

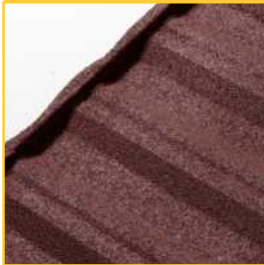

**Burgundy**




**Bronze**

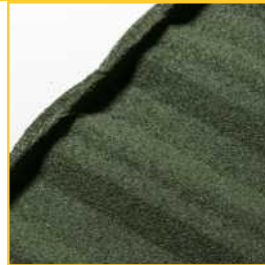

**Green**



**Terracotta**

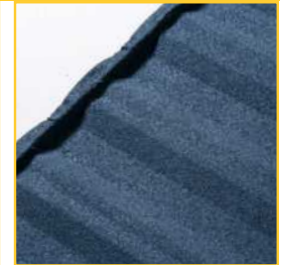

**Dark Blue**


## STONECOAT



**Thatch**



**Midnight Black**

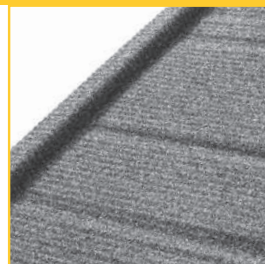

**Greystone**

## NON-STANDARD COLOURS



**Brick**




**Emerald Green**

(Available on request, subject to minimum order)


# Accessories

## 1 Angle Ridge




Fixed to double batten at apex  
 Length: 1720mm (cover 1600)  
 Width: 125mm tapered lengthwise  
 Height: 95mm  
 Mass: 2.5kg

## 8 Sidewall Flashing




Left and right hand serrated.  
 Sketch shows right handed sidewall.  
 Length: 1550mm Height: 115mm  
 Cover 4 tile courses  
 Width: 170mm Upper Lip: 10mm

## 2 Angle Ridge End Cap




Fixed to end of Angle Ridge  
 Width: 125mm  
 Height: 90mm

## 9 Cover Flashing




For use at headwall and sidewall flashing  
 as well as for short courses at ridge.  
 Length: 1720mm Width: 240mm  
 Upper Lip: 25mm Cover: 1600mm  
 Mass: 2.5 kg

## 3 Angle Hip Cap




Fixed to double batten at hip battens  
 Length: 580mm (cover 1 per tile course)  
 Width: 125mm tapered down to 123mm  
 Height: 75mm tapered up to 105mm  
 Mass: 0.8kg

## 10 Gable Trim




Fixed to gable ends  
 Length: 1720mm  
 (cover 1600mm)  
 Width: 60mm  
 Height: 68mm tapered up  
 Mass: 1.8kg

## 4 Angle Hip End Cap




Fixed to end of Angle Hip  
 Width: 125mm  
 Height: 70mm

## 11 Shake Trim




Length: 395mm  
 Width: 170mm  
 Cover: 370mm  
 Mass: 0.6kg

## 5 Square Ridge




Fixed to double batten at apex  
 Length: 1720mm  
 (cover 1600mm)  
 Width: 48mm tapered  
 lengthwise  
 Height: 70mm  
 Mass: 1.8kg

## 6 Square Hip Cap



Fixed to single hip batten  
 Length: 580mm  
 (cover 1 per tile course)  
 Width: 48mm tapered down  
 to 45mm  
 Height: 42mm tapered up  
 Mass: 0.5kg

## 7 Bargeboard Cover



Left and right hand serrated. Fixed to barge  
 boards at gable ends. Sketch shows right  
 handed barge board cover.  
 Length: 1550mm Height: 130mm  
 Cover 4 tile courses  
 Mass: 2.3kg

### The Harvey Quality Stamp

We take great care to ensure that every Harveytile is manufactured to the most stringent quality standards. As a division of Africa's leading steel supplier, Macsteel, we have access to the best steel. We prepare and press the steel to the finest tolerances, coat the tile with the finest paints and binding materials, cover the tile with only the best surfaces and finally the tile with the best looks.



Once complete, we take care to quality check every tile so as to ensure that it meets our exacting quality standards. Only then do we place our Harvey Quality Stamp on each tile.

This means you can rest assured that if the tile carries the Harveytile Quality

Stamp, that it's a Harveytile manufactured to the most exacting standards. If it doesn't say Harveytile, It's not a Harveytile... look for the Harveytile Quality Stamp.

"If it doesn't say Harveytile, its not a Harveytile"

